



Fasteners, Cutting Tools, and Shop Supplies

Chapter 9 CHAIN, CABLE, WIRE, HARDWARE BRACKETS, U-BOLTS

For the complete catalog visit our website at
www.BeltwaySupply.com

Beltway Supply, Inc.
7432 Alban Station
Suite B236
Springfield, VA 22150

Office [703] 372-5520
Toll Free [877] 216-7822
Fax [703] 372-5521
info@beltwaysupply.com



Table of Contents

By section

| | |
|---------------------------------------------------|----|
| CAP SCREWS,BOLTS STUDS & RODS | 1 |
| NUTS & WASHERS | 2 |
| SCREWS | 3 |
| PINS, RINGS, & RIVETS | 4 |
| CONSTRUCTION FASTENERS | 5 |
| STAINLESS STEEL FASTENERS | 6 |
| BRASS FASTENERS | 7 |
| METRIC FASTENERS | 8 |
| CHAIN, CABLE, WIRE, HARDWARE BRACKETS, U-BOLTS | 9 |
| ELECTRICAL TERMINALS & ACCESSORIES | 10 |
| FITTINGS & HOSE TIRE HARDWRE, O-RINGS | |
| CUTTING TOOLS | 12 |
| ABRASIVES | 13 |
| CHEMICALS | 14 |
| SAFTEY PRODUCTS | 15 |
| TOOLS | 16 |

Section 9: Chain & Wire Hardware

Table of Contents

Chain

| | |
|---------------------------------------------|---|
| Proof Coil Chain, <i>Zinc Plated</i> | 3 |
| Proof Coil Chain, <i>Galvanized</i> | 3 |
| Single Jack Chain, <i>Zinc Plated</i> | 4 |

Cable & Accessories

| | |
|-------------------------------------------|---|
| Aircraft Cable, <i>Galvanized</i> | 4 |
| Aircraft Cable, <i>Vinyl Coated</i> | 4 |
| Cable Swage Sleeves | 5 |
| Wire Rope Clamps | 5 |
| Wire Rope Thimbles | 5 |

Chain Hardware

| | |
|-----------------------------------------|---|
| Clevis Grab Hooks | 6 |
| Clevis Slip Hooks | 6 |
| Regular Grab Hooks | 6 |
| Regular Slip Hooks | 6 |
| Shackles, <i>Screw Pin Anchor</i> | 7 |
| Double Clevis Links | 7 |
| Quick Links | 7 |

Rigging Hardware

| | |
|--------------------------------------------------------------|----|
| Eye Bolts, <i>Drop Forged & Galvanized</i> | 8 |
| Machinery Lifting Eyes, <i>Drop Forged Plain Steel</i> | 8 |
| Turnbuckles, <i>Drop Forged & Galvanized</i> | 9 |
| Yoke Ends, <i>Plain Steel</i> | 9 |
| Eye Bolts, <i>Light Duty Zinc Plated</i> | 10 |
| Lag Screw Eyes, <i>Light Duty Zinc Plated</i> | 10 |
| Acoustical Lags, <i>Zinc Plated</i> | 10 |
| Midget Turnbuckles, <i>Light Duty Cast Aluminum</i> | 10 |

U-Bolts

| | |
|-------------------------------------------------------|----|
| Square Bend, <i>For Leaf Springs</i> | 11 |
| Round Bend, <i>For Leaf Springs</i> | 11 |
| Round Bend, <i>Zinc Plated for Pipe Hanging</i> | 11 |

Brackets

| | |
|---------------------------|----|
| Corner Braces | 12 |
| Flat Corner Braces | 12 |
| Flat Mending Braces | 12 |
| Shelf Brackets | 12 |

Steel Stock

| | |
|------------------------|----|
| Round Stock | 13 |
| Flat Stock | 13 |
| Perforated Angle | 13 |

Miscellaneous


| | |
|---------------------------------|----|
| Mechanics Wire | 14 |
| Perforated Hanger Strap | 14 |
| Rubber Tie Down Straps | 15 |
| S-Hooks | 15 |
| Bolt Snaps & Spring Clips | 16 |
| Pulleys | 16 |
| Bevel Washers | 17 |
| Bolt Cutters | 17 |

GRADE 30 PROOF COIL CHAIN

**** NOT TO BE USED FOR OVERHEAD LIFTING ****

100 LB. HANDY PAILS

Zinc Plated or Hot Dipped Galvanized

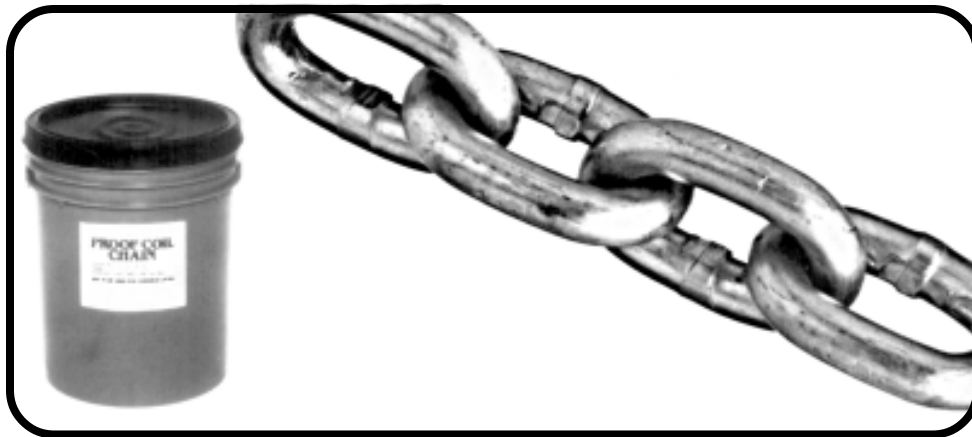

General utility low carbon steel chain used for such purposes as pulling stumps, lashing cargo, pipeline installations, logging, tow chains, mooring use, and truck tailgates.

| Trade Size Inch | Material Size Inch | Nominal Inside Link Length, Inches | Nominal Inside Link Width, Inches | Feet Per Pail | Maximum Working Load Limit | Part # * |
|--------------------------|--------------------|------------------------------------|-----------------------------------|---------------|----------------------------|----------------|
| ZINC PLATED | | | | | | |
| 3/16 | .202 | .97 | .40 | 250 | 750 lbs. | C0193 |
| 1/4 | .265 | 1.02 | .50 | 141 | 1250 lbs. | C0194 |
| 5/16 | .312 | 1.24 | .50 | 92 | 1900 lbs. | C0195 |
| 3/8 | .394 | 1.35 | .57 | 63 | 2650 lbs. | C0196 |
| 1/2 | .512 | 1.70 | .75 | 35 | 4500 lbs. | C0197 |
| HOT GALVANIZED ** | | | | | | |
| 3/16 | .202 | .97 | .40 | 250 | 750 lbs. | C0193-G |
| 1/4 | .265 | 1.02 | .40 | 141 | 1250 lbs. | C0194-G |
| 5/16 | .312 | 1.24 | .50 | 92 | 1900 lbs. | C0195-G |
| 3/8 | .394 | 1.35 | .50 | 63 | 2650 lbs. | C0196-G |


* **AVAILABLE BY THE FOOT:** To order just add "FT" after the part number and indicate number of feet. (Example: C0193FT would get you the number of feet of 3/16 zinc plated chain you wanted.)

** **WARNING:** Hot galvanizing can reduce work load limits by up to 20 percent.

- » Do not exceed work load limits.
- » Not to be used for overhead lifting.
- » Every foot of proof coil chain has been proof tested prior to leaving the factory to insure compliance with published specifications.

SINGLE JACK CHAIN

Bright Zinc

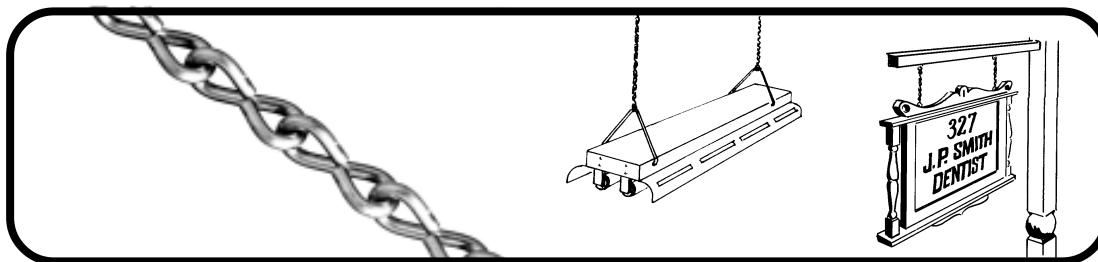

| Trade Size | Wire Diameter Inch | Approximate Links Per Foot | Approximate Weight Per 100 Ft. | Maximum Working Load Limit | Part # |
|------------|--------------------|----------------------------|--------------------------------|----------------------------|--------|
| 12 | .1055 | 16 | 8.5 lbs. | 29 lbs. | C6026 |


» Quantity: 100 feet per box.

» Ideal for hanging lighting fixtures and novelties, such as flower pots, children's toys and other general utility applications.

AIRCRAFT CABLE

(WIRE ROPE)

Galvanized

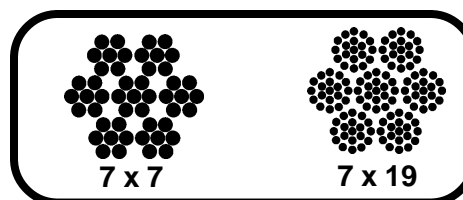

9


| Diameter without Coating | Diameter with Coating | Stranding | Approximate Breaking Strength | Part # | Roll Length |
|--------------------------|-----------------------|-----------|-------------------------------|---------|-------------|
| Galvanized | | | | | |
| 1/16 | — | 7 x 7 | 480 | AC01 | 500' |
| 3/32 | — | 7 x 7 | 920 | AC015 | 500' |
| 1/8 | — | 7 x 7 | 1700 | AC02 | 500' |
| 3/16 | — | 7 x 19 | 4200 | AC03 | 250' |
| 1/4 | — | 7 x 19 | 7000 | AC04 | 250' |
| Vinyl Coated | | | | | |
| 1/16 | 3/32 | 7 x 7 | 480 | AC01VC | 500' |
| 3/32 | 1/8 | 7 x 7 | 902 | AC015VC | 500' |
| 1/8 | 3/16 | 7 x 7 | 1700 | AC02VC | 500' |
| 3/16 | 1/4 | 7 x 19 | 4200 | AC03VC | 250' |
| 1/4 | 5/16 | 7 x 19 | 7000 | AC04VC | 250' |

» **AVAILABLE BY THE FOOT:** To order just add "FT" after the part number and indicate number of feet. (Example: AC03VCFT would get you the number of feet of 3/16 coated cable you wanted.)

SWAGE SLEEVES

Zinc Plated

- » Sleeves, when properly applied, are capable of holding the rated breaking strength of the cable to which they are applied.



| Cable Size | Part # | Qty |
|------------|--------|-----|
| 1/8 | ACS02 | 100 |
| 1/8, 3/16 | ACS02A | 100 |
| 3/16 | ACS03 | 100 |
| 1/4 | ACS04 | 100 |

MALLEABLE WIRE ROPE CLAMPS

Zinc Plated




- » Malleable iron base (saddle) with steel u-bolt and finished hex nuts.
- » Meets Federal Specification FF-C-450 Type 1 Class 2.

| Rope Size | Part # | Qty |
|-----------|--------|-----|
| 1/8 | WRC-02 | 25 |
| 3/16 | WRC-03 | 25 |
| 1/4 | WRC-04 | 25 |
| 5/16 | WRC-05 | 25 |
| 3/8 | WRC-06 | 25 |
| 7/16 | WRC-07 | 10 |
| 1/2 | WRC-08 | 10 |
| 5/8 | WRC-10 | 5 |
| 3/4 | WRC-12 | 5 |
| 7/8 | WRC-14 | 1 |
| 1 | WRC-16 | 1 |

9

WIRE ROPE THIMBLES

Hot Dip Galvanized Steel

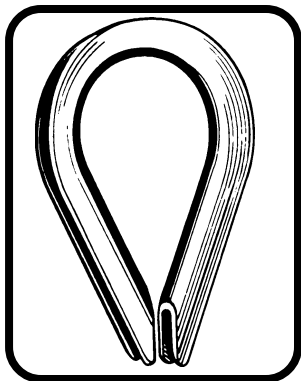

- » Meets Federal Specification FF-T-276B Type 2.

| For Rope Dia. In. | Overall Length Inches | Inside Width Inches | Part # | Qty |
|-------------------|-----------------------|---------------------|--------|-----|
| 1/8 | 1-15/16 | 11/16 | WRT-02 | 25 |
| 3/16 | 1-7/8 | 23/32 | WRT-03 | 25 |
| 1/4 | 1-7/8 | 23/32 | WRT-04 | 25 |
| 5/16 | 2-3/16 | 25/32 | WRT-05 | 25 |
| 3/8 | 2-1/2 | 15/16 | WRT-06 | 25 |
| 1/2 | 2-13/16 | 1-1/8 | WRT-08 | 10 |
| 5/8 | 3-5/8 | 1-1/2 | WRT-10 | 10 |
| 3/4 | 4-5/16 | 1-7/8 | WRT-12 | 10 |
| 7/8 | 5-3/16 | 2-3/16 | WRT-14 | 5 |
| 1 | 6-1/8 | 2-21/32 | WRT-16 | 5 |

“CLEVIS” GRAB & SLIP HOOKS

SHOT BLASTED - RUST INHIBITED

Drop Forged Steel



Grab



Slip

| Size | Inside Width at Pin | Pin Dia. | Hook Opening | | Part # | | Qty |
|------|---------------------|----------|--------------|-------------|-------------|-------------|-----|
| | | | Clevis Grab | Clevis Slip | Clevis Grab | Clevis Slip | |
| 1/4 | 11/32 | 5/16 | 11/32 | 3/4 | CG-04 | CS-04 | 1 |
| 5/16 | 13/32 | 3/8 | 13/32 | 15/16 | CG-05 | CS-05 | 1 |
| 3/8 | 1/2 | 7/16 | 1/2 | 1-3/32 | CG-06 | CS-06 | 1 |
| 1/2 | 21/32 | 9/16 | 21/32 | 1-13/32 | CG-08 | CS-08 | 1 |

Grab Hooks

» Securely holds a single link of chain in narrow opening. Excellent for looping chain around a load in a choker arrangement.

Slip Hooks

» Allow chain to slide through the throat of the hook. They are sized by the diameter of the chain they are to engage. Commonly used with chain to make a loop that will tighten around a load when pulled taut. Excellent for pulling material or securing loads.

» **WARNING:** Do not use for overhead lifting when used with chain.

» When used with wire rope, ensure that the eye diameter will accommodate the wire rope thimble.


» Clevis attach to chain links and other closed-end attachments using the clevis pin.



DROP FORGED STEEL SHACKLES

SCREW PIN ANCHOR

Hot Dip Galvanized



- » Screw Pin Anchor Shackles are used to attach fittings to chain and wire rope rigging lines.
- » Ideal for multiple connections.
- » Screw Pins are easy to remove without the use of tools.
Ideal for applications where shackle is frequently removed.
- » Not for use if there will be movement or vibration of the pin.

| Size | Fed Spec RR-C-271B | | Part # | Qty |
|------|---------------------|---------------|----------|-----|
| | Inside Width at Pin | Inside Length | | |
| 3/16 | 3/8 | 7/8 | SHACK-03 | 1 |
| 1/4 | 15/32 | 1-1/8 | SHACK-04 | 1 |
| 5/16 | 17/32 | 1-7/32 | SHACK-05 | 1 |
| 3/8 | 21/32 | 1-7/16 | SHACK-06 | 1 |
| 7/16 | 23/32 | 1-11/16 | SHACK-07 | 1 |
| 1/2 | 13/16 | 1-7/8 | SHACK-08 | 1 |
| 5/8 | 1-1/16 | 2-13/32 | SHACK-10 | 1 |
| 3/4 | 1-1/4 | 2-27/32 | SHACK-12 | 1 |
| 7/8 | 1-7/16 | 3-5/16 | SHACK-14 | 1 |
| 1 | 1-11/16 | 3-3/4 | SHACK-16 | 1 |

DOUBLE CLEVIS LINKS

ZINC PLATED




| Length | Max Load | Part # | Qty |
|------------|-----------|------------|-----|
| 1/4 & 5/16 | 3900 lbs. | NAT-240879 | 5 |
| 3/8 | 5400 lbs. | NAT-240887 | 3 |

9

QUICK LINKS

Zinc Plated




- » Connectors are reusable.
- » Threaded connectors offer a quick and easy way to attach end fittings and repair chain. To close, simply screw the nut onto the threaded end.

| Size | Overall Length | Gap Opening | Average Tensile Lbs. | Part # | Qty |
|------|----------------|-------------|----------------------|--------|-----|
| 1/8 | 1-3/8 | 3/16 | 660 | QL-02 | 5 |
| 3/16 | 1-7/8 | 1/4 | 2200 | QL-03 | 5 |
| 1/4 | 2-1/4 | 9/32 | 3300 | QL-04 | 5 |
| 5/16 | 2-15/16 | 3/8 | 7700 | QL-05 | 5 |
| 3/8 | 3-1/8 | 7/16 | 8800 | QL-06 | 5 |
| 1/2 | 4-1/8 | 19/32 | 14300 | QL-08 | 5 |

DROP FORGED EYE BOLTS

Hot Galvanized

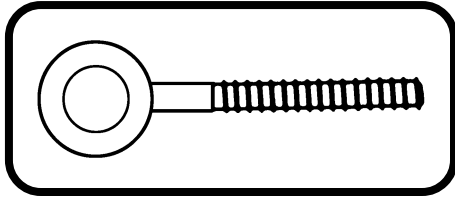


- » Machine thread eye bolts are threaded National Coarse before galvanizing and assembled with hex nuts tapped oversize.
- » Loads are based on a safety factor of 5 to 1.
- » When tested all eye bolts are pulled at a uniform rate of speed in a direct tension.
- » WARNING: Any deviations such as angular lifts, shock loads, modification of the basic forging, etc., will result in drastically reduced working load limits.

| Dia | Length | Max Load | Part # | Qty |
|-------------|--------|-----------|------------|-----|
| 1/4 | 2" | 500 lbs. | CHI-080057 | 1 |
| | 4" | 500 lbs. | CHI-080118 | 1 |
| | 6" | 500 lbs. | CHI-080170 | 1 |
| 5/16 | 2-1/4" | 800 lbs. | CHI-080224 | 1 |
| | 3-1/4" | 800 lbs. | CHI-080255 | 1 |
| | 4-1/4" | 800 lbs. | CHI-080286 | 1 |
| | 5" | 800 lbs. | CHI-080316 | 1 |
| | 6" | 800 lbs. | CHI-080347 | 1 |
| 3/8 | 2-1/2" | 1200 lbs. | CHI-080392 | 1 |
| | 3" | 1200 lbs. | CHI-080422 | 1 |
| | 4-1/2" | 1200 lbs. | CHI-080453 | 1 |
| | 6" | 1200 lbs. | CHI-080514 | 1 |
| 1/2 | 8" | 1200 lbs. | CHI-080545 | 1 |
| | 3-1/2" | 2200 lbs. | CHI-080620 | 1 |
| | 4-1/2" | 2200 lbs. | CHI-080651 | 1 |
| | 6" | 2200 lbs. | CHI-080682 | 1 |
| | 8" | 2200 lbs. | CHI-080712 | 1 |
| 5/8 | 10" | 2200 lbs. | CHI-080743 | 1 |
| | 6" | 3500 lbs. | CHI-080859 | 1 |
| | 10" | 3500 lbs. | CHI-080910 | 1 |
| | 18" | 3500 lbs. | CHI-081009 | 1 |
| 3/4 | 24" | 3500 lbs. | CHI-081030 | 1 |
| | 6" | 5200 lbs. | CHI-081115 | 1 |
| | 10" | 5200 lbs. | CHI-081177 | 1 |
| 1 | 18" | 5200 lbs. | CHI-081269 | 1 |
| | 24" | 5200 lbs. | CHI-081290 | 1 |

9

MACHINERY LIFTING EYE BOLTS

Drop Forged Steel




- » Heat treated after forging.
- » Self-colored.

| Diameter | Length | Part # | Qty |
|----------|--------|------------|-----|
| 1/4 | 1" | CHI-116053 | 1 |
| 5/16 | 1-1/8" | CHI-116251 | 1 |
| 3/8 | 1-1/4" | CHI-116459 | 1 |
| 7/16 | 1-3/8" | CHI-116657 | 1 |
| 1/2 | 1-1/2" | CHI-116855 | 1 |
| 9/16 | 1-5/8" | CHI-117050 | 1 |
| 5/8 | 1-3/4" | CHI-117258 | 1 |
| 3/4 | 2" | CHI-117487 | 1 |
| 7/8 | 2-1/4" | CHI-117685 | 1 |
| 1 | 2-1/2" | CHI-117883 | 1 |

DROP FORGED TURNBUCKLES

MARINE TYPE

Hot Dip Galvanized Steel

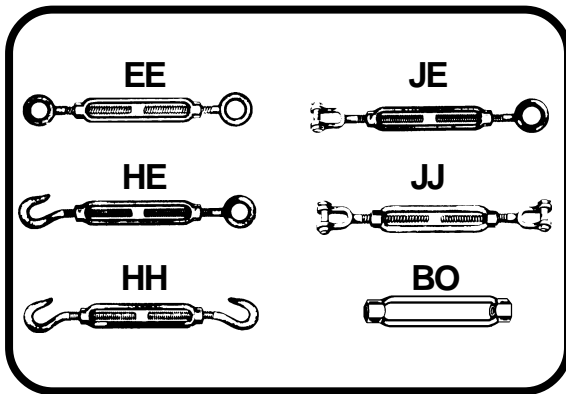

- » Make sure to add:
-EE, -HE, -HH, -JE, or -JJ to part numbers to indicate which type of turnbuckle you want.
(Example: #TRBK-04-JJ would be 1/4" x 4" Jaw & Jaw)
- » To order the body only add -BO to the part number.
(Example: #TRBK-04-BO)

| Thread Dia. & Take-Up Inches | Approximate Overall Length Closed, Inches | Part #* | Qty |
|------------------------------|-------------------------------------------|---------|-----|
| 1/4 x 4" | 8" | TRBK-04 | 1 |
| 5/16 x 4-1/2" | 9" | TRBK-05 | 1 |
| 3/8 x 6" | 12" | TRBK-06 | 1 |
| 1/2 x 6" | 13" | TRBK-07 | 1 |
| 1/2 x 9" | 16" | TRBK-08 | 1 |
| 1/2 x 12" | 19" | TRBK-09 | 1 |
| 5/8 x 6" | 15-1/2" | TRBK-10 | 1 |
| 5/8 x 9" | 18-1/2" | TRBK-11 | 1 |
| 5/8 x 12" | 21-1/2" | TRBK-12 | 1 |
| 5/8 x 18" | 28" | TRBK-13 | 1 |
| 3/4 x 6" | 17" | TRBK-14 | 1 |
| 3/4 x 9" | 20" | TRBK-15 | 1 |
| 3/4 x 12" | 23" | TRBK-16 | 1 |
| 3/4 x 18" | 29-3/4" | TRBK-17 | 1 |
| 7/8 x 12" | 24-5/8" | TRBK-18 | 1 |
| 7/8 x 18" | 33-1/4" | TRBK-19 | 1 |
| 1 x 6" | 18" | TRBK-20 | 1 |
| 1 x 12" | 24" | TRBK-21 | 1 |
| 1 x 18" | 33-1/4" | TRBK-22 | 1 |


9

YOKE ENDS

DROP FORGED — ADJUSTABLE

Plain Finish

| "T" Tap Size | A | B | C | D | E | F | G | H | K | Part # | Qty |
|--------------|---------|--------|--------|---------|-------|-------|------|-------|--------|--------|-----|
| 1/4-28 | 2" | 7/16 | 7/16 | 1-1/4 | 9/32 | 5/8 | 1/4 | 3/4 | 1/2 | A10788 | 2 |
| 5/16-24 | 2-1/4 | 1/2 | 1/2 | 1-7/16 | 11/32 | 3/4 | 5/16 | 13/16 | 19/32 | A10789 | 2 |
| 3/8-24 | 2-1/2 | 5/8 | 5/8 | 1-5/8 | 7/16 | 7/1 | 3/8 | 7/8 | 11/16 | A10790 | 2 |
| 7/16-24 | 2-7/8 | 23/32 | 23/32 | 1-7/8 | 1/2 | 1" | 7/16 | 1" | 13/16 | A10791 | 2 |
| 1/2-20 | 3" | 13/16 | 13/16 | 1-7/8 | 9/16 | 1-1/8 | 1/2 | 1-1/8 | 15/16 | A10792 | 2 |
| 5/8-18 | 4-15/16 | 1-1/16 | 1-1/16 | 3-11/16 | 11/16 | 1-3/8 | 5/8 | 1-1/4 | 1-3/16 | A10793 | 2 |



- » Ideal for pivot-point linkages of shafts, rods, and other assemblies.
- » Furnished with a clevis pin and a cotter pin.

EYE BOLTS

MACHINE THREAD OR LAG THREAD

Zinc Plated

MACHINE THREAD

| Dia. | Shank Length | Part # | Qty |
|---------|--------------|--------|-----|
| 3/16-24 | 1 | C-1 | 10 |
| | 2 | C-3 | 10 |
| 1/4-20 | 1 | E-1 | 10 |
| | 2 | E-3 | 10 |
| | 3 | E-5 | 10 |
| | 4 | E-7 | 10 |
| 5/16-18 | 2 | F-2 | 10 |
| | 3 | F-4 | 10 |
| | 4 | F-6 | 10 |
| | 5 | F-7 | 10 |
| 3/8-16 | 2-1/2 | G-3 | 10 |
| | 4 | G-6 | 10 |
| | 6 | G-8 | 10 |



LAG THREAD

| Dia. | Length | Part # | Qty |
|------|--------|--------|-----|
| 1/4 | 2-3/4 | LS1 | 10 |
| | 4 | LS2 | 10 |
| 5/16 | 2-3/4 | LS3 | 10 |
| | 4-3/4 | LS4 | 10 |
| 3/8 | 3 | LS5 | 10 |
| | 6 | LS6 | 10 |



ACOUSTICAL LAG

| Dia. | Length | Part # | Qty |
|------|--------|--------|-----|
| 1/4 | 3 | 03950 | 50 |




9

MIDGET TURNBUCKLES

EYE & EYE AND HOOK & EYE

Sand Cast Aluminum Bodies

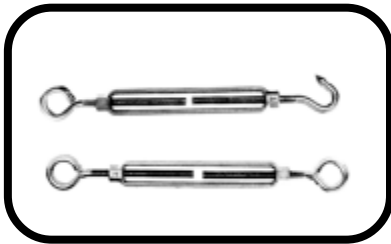

» Sand cast aluminum bodies with hex heads


» Zinc plated steel hooks or eyes.

| Style | Diameter | Length | Part # | Qty |
|------------|----------|--------|------------|-----|
| Eye & Eye | 8-32 | 3-3/8 | CHI-051057 | 1 |
| Eye & Eye | 10-24 | 4" | CHI-051088 | 1 |
| Eye & Eye | 12-24 | 4/12 | CHI-051118 | 1 |
| Eye & Eye | 1/4-20 | 5-1/2 | CHI-051149 | 1 |
| Eye & Eye | 5/16-18 | 6-3/4 | CHI-051170 | 1 |
| Eye & Eye | 3/8-16 | 7-1/2 | CHI-051200 | 1 |
| Hook & Eye | 10-24 | 4" | CHI-052085 | 1 |
| Hook & Eye | 1/4-20 | 5-1/2 | CHI-052146 | 1 |
| Hook & Eye | 5/16-18 | 6-3/4 | CHI-052177 | 1 |
| Hook & Eye | 3/8-16 | 7-1/2 | CHI-052207 | 1 |

U-BOLTS


SQUARE BEND AND ROUND STYLE

Primarily used for leaf spring to axle attachment

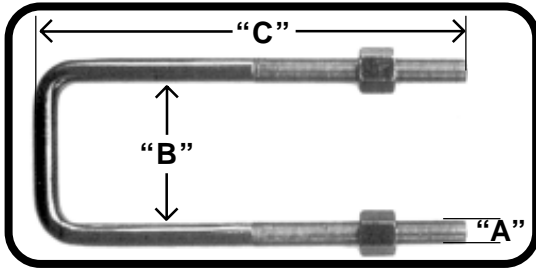

Square Bend

| Dimensions (A x B x C) | Part # | Qty |
|------------------------|---------|-----|
| 1/2 x 1-3/4 x 6 | UB-S132 | 1 |
| 1/2 x 2 x 6 | UB-S134 | 1 |
| 1/2 x 2-5/8 x 1-1/2 | UB-S139 | 1 |
| 9/16 x 2-1/2 x 8 | UB-S146 | 1 |
| 9/16 x 2-5/8 x 8 | UB-S148 | 1 |
| 9/16 x 3 x 11-3/4 | UB-S155 | 1 |
| 5/8 x 2-5/8 x 12-1/4 | UB-S162 | 1 |
| 5/8 x 3-1/8 x 7-3/4 | UB-S170 | 1 |
| 5/8 x 4 x 11-1/4 | UB-S178 | 1 |

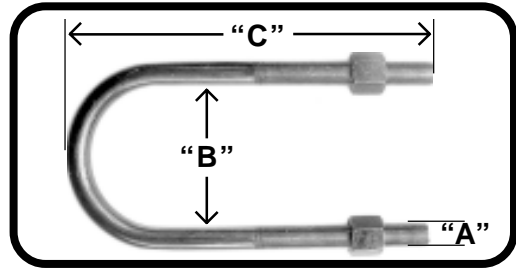


Round Style

| Dimensions (A x B x C) | Part # | Qty |
|------------------------|---------|-----|
| 1/2 x 2-1/2 x 8-1/4 | UB-R236 | 1 |
| 1/2 x 2-7/8 x 7 | UB-R240 | 1 |
| 1/2 x 3 x 8 | UB-R242 | 1 |
| 9/16 x 3 x 8-1/4 | UB-R246 | 1 |
| 9/16 x 3-1/4 x 8 | UB-R250 | 1 |
| 9/16 x 3-3/8 x 12 | UB-R253 | 1 |
| 9/16 x 3-1/2 x 8 | UB-R254 | 1 |
| 9/16 x 3-3/4 x 8 | UB-R258 | 1 |
| 5/8 x 3 x 8-1/2 | UB-R266 | 1 |
| 5/8 x 3-1/4 x 8-1/4 | UB-R270 | 1 |

ROUND BEND U-BOLTS

FOR STEEL OR WROUGHT IRON PIPES

Zinc Plated

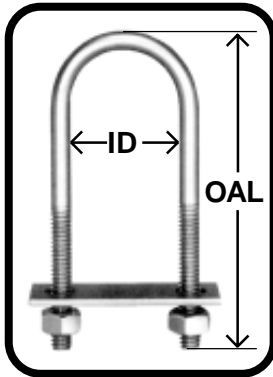


» Round bend U-bolts for steel or wrought iron pipe produced from low carbon steel and supplied with NC rolled threads, two hex nuts and U-bolt plate.

| Diameter & Thread | I.D. | O.A.L | Trade Size | Part # | Qty |
|-------------------|-------|---------|------------|------------|-----|
| 1/4-20 | 1 | 1-3/4 | 4 | CHI-502146 | 1 |
| 1/4-20 | 1-1/8 | 2" | 5 | CHI-502207 | 1 |
| 1/4-20 | 1-1/8 | 3-1/8 | 5L | CHI-502238 | 1 |
| 1/4-20 | 1-1/2 | 2-3/4 | 7 | CHI-502290 | 1 |
| 5/16-18 | 1-3/8 | 2-3/16 | 11 | CHI-502443 | 1 |
| 5/16-18 | 1-3/8 | 3-5/8 | 11L | CHI-502474 | 1 |
| 5/16-18 | 1-3/4 | 2-11/16 | 13 | CHI-502535 | 1 |
| 5/16-18 | 1-3/4 | 4-1/2 | 13L | CHI-502566 | 1 |
| 5/16-18 | 2" | 2-11/16 | 14 | CHI-502597 | 1 |
| 5/16-18 | 2" | 4-3/4 | 14L | CHI-502627 | 1 |
| 5/16-18 | 2-1/2 | 3-3/16 | 15 | CHI-502658 | 1 |
| 5/16-18 | 2-1/2 | 5-5/8 | 15L | CHI-502689 | 1 |
| 3/8-16 | 2-1/2 | 3-1/8 | 22 | CHI-502894 | 1 |
| 3/8-16 | 3-1/2 | 4-1/8 | 24 | CHI-502986 | 1 |

BRACKETS

CORNER BRACES


Zinc Plated



| Leg Length | Width | Part # | Qty |
|------------|-------|------------|-----|
| 1-1/2 | 5/8 | NAT-113126 | 1 |
| 2" | 5/8 | NAT-113290 | 1 |
| 3" | 3/4 | NAT-113449 | 1 |

FLAT CORNER BRACES


Zinc Plated



| Leg Length | Width | Part # | Qty |
|------------|-------|------------|-----|
| 1-1/2 | 3/8 | NAT-113787 | 1 |
| 2 | 3/8 | NAT-113837 | 1 |
| 2-1/2 | 1/2 | NAT-113910 | 1 |
| 3 | 1/2 | NAT-113951 | 1 |

MENDING BRACES


Zinc Plated



| Length | Width | Part # | Qty |
|--------|-------|------------|-----|
| 2" | 1/2 | NAT-114306 | 1 |
| 3" | 5/8 | NAT-114348 | 1 |
| 4" | 5/8 | NAT-114397 | 1 |
| 5" | 5/8 | NAT-114439 | 1 |

SHELF BRACKETS

Gray Finish



| "A" Length | "B" Length | Part # | Qty |
|------------|------------|------------|-----|
| 6" | 8" | NAT-171066 | 1 |
| 8" | 10" | NAT-171074 | 1 |
| 10" | 12" | NAT-171082 | 1 |
| 12" | 14" | NAT-172619 | 1 |

STEEL STOCK

ROUND, FLAT & ANGLE

Cold Rolled

ROUND STOCK



Sold in 3 foot Lengths

| Size | Part # |
|------|-----------|
| 3/16 | LAN-44093 |
| 1/4 | LAN-44133 |
| 5/16 | LAN-44143 |
| 3/8 | LAN-44153 |
| 7/16 | LAN-44163 |
| 1/2 | LAN-44173 |
| 5/8 | LAN-44193 |
| 3/4 | LAN-44203 |

FLAT STOCK




Sold in 3 foot Lengths

| Size | Part # |
|-------|-----------|
| 3/4 | LAN-25203 |
| 1" | LAN-25223 |
| 1-1/4 | LAN-25243 |

« Galvanized
« 14 Guage (.074" Thick)

PERFORATED ANGLE STOCK



Sold in 4 foot Lengths

| Size | Part # |
|---------------|-----------|
| 1-1/2 x 1-1/2 | LAN-29264 |


« Galvanized
« 14 Guage (.074" Thick)

MECHANICS WIRE

18 GAUGE & 16 GAUGE

Soft Annealed, Black Steel Wire

| Size | Part # |
|-----------------|--------|
| 18 GAUGE | |
| 2 lb. spool | A14205 |
| 5 lb. spool | A14207 |
| 16 GAUGE | |
| 2 lb. spool | A14206 |
| 5 lb. spool | A14208 |



PERFORATED HANGING STRAPING

Galvanized or Copper Plated

9

| Size | Length | Type | Part # | Qty |
|-------|--------|------------|--------|-----|
| 24 ga | 10 ft. | Galvanized | WW-GAL | 1 |
| 24 ga | 10 ft. | Copper | WW-COP | 1 |



- » Safe-T-Edge hanger bar is convenient to use, speeds installation, reduces labor costs, requires less storage space and costs less per foot.
- » The Safe-T-Edge reduces accidents and because you buy in workable lengths, there are fewer waste ends.
- » Has 17/64" holes for 1/4" bolts.

RUBBER HOLD DOWN STRAPS

WITH HOOKS

(Bungie Cords)






| Size | Span | Part # | Qty |
|------|----------|--------|-----|
| 9" | 15 to 20 | RS-9B | 1 |
| 15" | 20 to 30 | RS-15 | 1 |
| 22" | 30 to 40 | RS-22 | 1 |
| 31" | 40 to 55 | RS-31 | 1 |
| 41" | 47 to 76 | RS-41 | 1 |

"S" HOOKS

FOR LIGHTING FIXTURES - CANVAS TIEDOWNS

Zinc Plated

| Dia | Length | Part # | Qty |
|------|--------|--------|-----|
| .080 | 1-1/16 | S-1 | 100 |
| .093 | 7/8 | S-5 | 100 |
| .105 | 1-3/32 | S-2 | 100 |
| .120 | 1-5/16 | S-3 | 100 |
| .120 | 2-1/8 | S-7 | 50 |
| .135 | 1-9/16 | S-4 | 50 |
| .148 | 2 | S-9 | 50 |
| .162 | 1-7/16 | S-8 | 50 |
| .177 | 2 | S-6 | 25 |
| .177 | 2-7/8 | S-13 | 25 |
| .188 | 2-7/8 | S-10 | 25 |
| .250 | 2-1/2 | S-11 | 25 |
| .312 | 2-5/8 | S-12 | 25 |

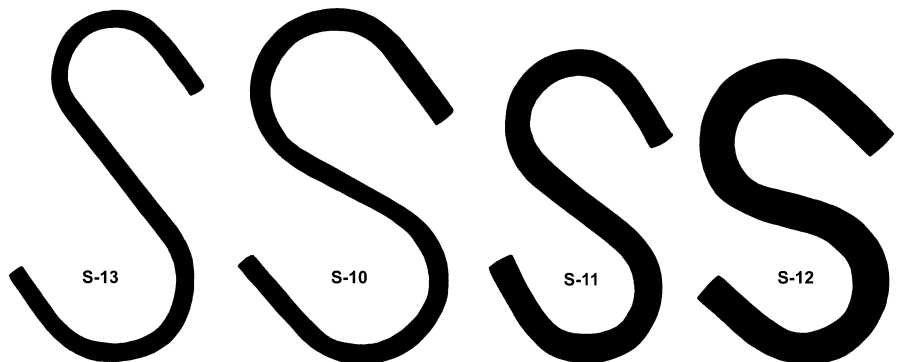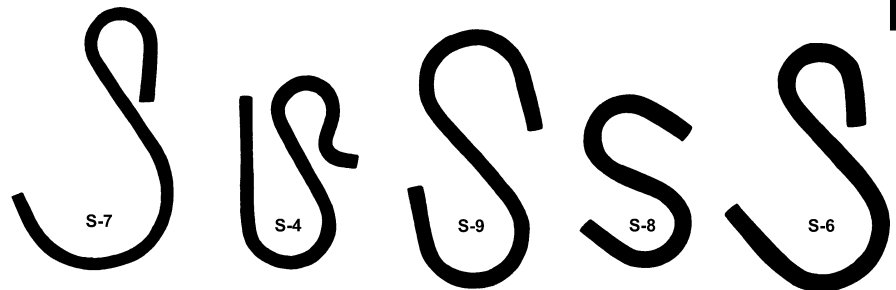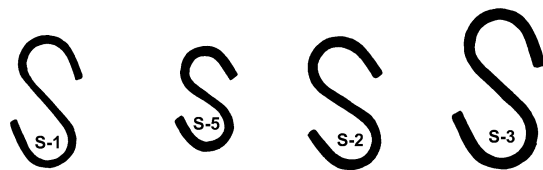

9

BOLT SNAPS & SPRING CLIPS



BAR-125



BAR-334




BAR-162



BAR-437



BAR-225



BAR-830



BAR-231
BAR-232



BAR-2450



BAR-3142



BAR-5013



BAR-5025



BAR-5037



BAR-Z251

| Description | Size | Part # | Qty |
|------------------------------|--------|---------------|-----|
| 3/8 Swivel Decoy Snap | 3/8 | BAR-334-3/8 | 1 |
| 3/8 Open Swivel Snap | 3/8 | BAR-5037-3/8 | 1 |
| 3/8 Swivel Dog Lead Snap | 3/8 | BAR-437-3/8 | 1 |
| 1/4 Spring Hook | 1/4 | BAR-2450-1/4 | 1 |
| 5/16 Spring Hook | 5/16 | BAR-2450-5/16 | 1 |
| 3/8 Spring Hook | 3/8 | BAR-2450-3/8 | 1 |
| 5/8 Swivel Eye Snap | 5/8 | BAR-225-5/8 | 1 |
| 3/4 Swivel Eye Snap | 3/4 | BAR-225-3/4 | 1 |
| 1" Swivel Eye Snap | 1" | BAR-225-1 | 1 |
| 1/2 Swivel Trigger Snap | 1/2 | BAR-5013-1/2 | 1 |
| 5/8 Round Eye Bolt Snap | 5/8 | BAR-125-5/8 | 1 |
| 1/2 Swivel Eye Leash Snap | 1/2 | BAR-5025-1/2 | 1 |
| Double Pattern Chain | Medium | BAR-162 | 1 |
| Open Eye Chain Snap | Small | BAR-231 | 1 |
| Open Eye Chain Snap | Medium | BAR-232 | 1 |
| 3/4 Spring Swivel Snap | 3/4 | BAR-830-3/4 | 1 |
| 7/8 Swivel Eye Security Snap | 7/8 | BAR-3142 | 1 |
| 5/8 Swivel Eye Snap | 5/8 | BAR-Z251-5/8 | 1 |

9

PULLEYS



BAR-0173



BAR-0174



BAR-0176




BAR-0178

| Description | Size | Part # | Qty |
|-------------------------------|-------|----------------|-----|
| Single Wheel Swivel Eye Pully | 3/4 | BAR-0173-3/4 | 1 |
| Single Wheel Swivel Eye Pully | 1" | BAR-0173-1 | 1 |
| Single Wheel Swivel Eye Pully | 1-1/2 | BAR-0173-1-1/2 | 1 |
| Single Wheel Swivel Eye Pully | 2" | BAR-0173-2 | 1 |
| Single Wheel Solid Eye Pully | 3/4 | BAR-0174-3/4 | 1 |
| Single Wheel Solid Eye Pully | 1" | BAR-0174-1 | 1 |
| Single Wheel Solid Eye Pully | 1-1/2 | BAR-0174-1-1/2 | 1 |
| Single Wheel Solid Eye Pully | 2" | BAR-0174-2 | 1 |
| Double Wheel Solid Eye Pully | 3/4 | BAR-0176-3/4 | 1 |
| Double Wheel Solid Eye Pully | 1" | BAR-0176-1 | 1 |
| Double Wheel Swivel Eye Pully | 3/4 | BAR-0178-3/4 | 1 |
| Double Wheel Swivel Eye Pully | 1" | BAR-0178-1 | 1 |

MALLEABLE BEVEL WASHERS

STANDARD PATTERN - SLOPE 2" IN 12" OR 9° 28'

PLATING: ZINC



| Bolt Size Inches | Diameter Across Washer | Hole Size Inches | Thickness Heavy End | Thickness Light End | Part # | Qty |
|---------------------|------------------------------|------------------------|---------------------------|---------------------------|--------|-----|
| 1/4 | 11/16 x 11/16 | 5/16 | 7/32 | 5/64 | 00450 | 100 |
| 5/16 | 1 x 1 | 3/8 | 1/4 | 3/32 | 00451 | 100 |
| 3/8 | 1-1/4 x 1-1/4 | 7/16 | 11/32 | 5/32 | 00452 | 50 |
| 1/2 | 1-1/4 x 1-1/4 | 9/16 | 11/32 | 5/32 | 00453 | 50 |
| 5/8 | 1-1/2 x 1-1/2 | 11/16 | 13/32 | 5/32 | 00454 | 25 |
| 3/4 | 1-1/2 x 1-1/2 | 13/16 | 15/32 | 7/32 | 00455 | 25 |
| 7/8 | 2 x 2 | 15/16 | 9/16 | 7/32 | 00456 | 15 |
| 1 | 2 x 2 | 1-1/16 | 9/16 | 7/32 | 00457 | 10 |

BOLT CUTTERS



» For cutting reinforcing rods, medium tensile and soft bolts, rods, rivet bars and chain.

» Exceeds Federal Specification #GGG-C740d Type II.

| Jaws | Length | Cutting Capacity | Part # | Qty |
|--------|--------|------------------|------------|-----|
| Center | 18" | 5/16" | BNT-821805 | 1 |
| Center | 24" | 3/8" | BNT-821806 | 1 |

*No matter what industry you work in, we
can supply the products you need.*



Beltway Supply, Inc.
7432 Alban Station Blvd
Suite B236
Springfield, VA 22150

Office [703] 372-5520
Toll Free [877]216-7822
Fax [703] 372-5521
info@beltwaysupply.com